


FINISHED SURFACE TO BE GRADED PER THE ARCHITECT OR ENGINEERS SPECIFICATIONS AND READY FOR SEEDING, SODDING OR PLANTING. PLANT MATERIAL "TBD" AND CAN GROW THROUGH THE SOX WITHOUT COMPROMIZING THE SOX'S STABLE.

DEPTH OF BACKFILL COVER MATERIAL WILL VARY DEPENDING ON FINISHED SLOPE. MATERIAL CAN BE THE SAME AS SOX BACKFILL MATERIAL.

1/4" DIAMOND BRAIDED POLY CORE ANCHORING ROPES.

NOTE: LOWER SOX ROPE CHANNEL MUST BE CONNECTED TO BOTH THE UPPER AND LOWER STAKE AS SHOWN BELOW.

SHORESOX OR DREDGESOX BACKFILLED WITH SITE OR PROJECT SPECIFIC BACKFILL. WIDTH OF SOX TO BE DETERMINED BY SITE CONDITIONS (I.E. SHORE SLOPE AND AMOUNT OF SHORELINE TO BE RECAPTURED/PROTECTED). BACKFILL MATERIAL SHOULD BE COARSE AND NO LESS THAN 120 MICRONS AND IS TYPICALLY ONE OF THE FOLLOWING MATERIALS (sand, topsoil, aeration plugs/cores, dredging spoils or and organic compost type mixture). IT IS RECOMMENDED THAT ALL FILL MATERIALS BE TESTED FOR PARTICLE SIZE AND FILTRATION PROPERTIES PRIOR TO INSTALL. NON-DREDGED BACKFILL CAN ALSO BE WASHED OR WATER SETTLED INTO THE SOX FOR STABILITY AND COMPACTION PURPOSES.

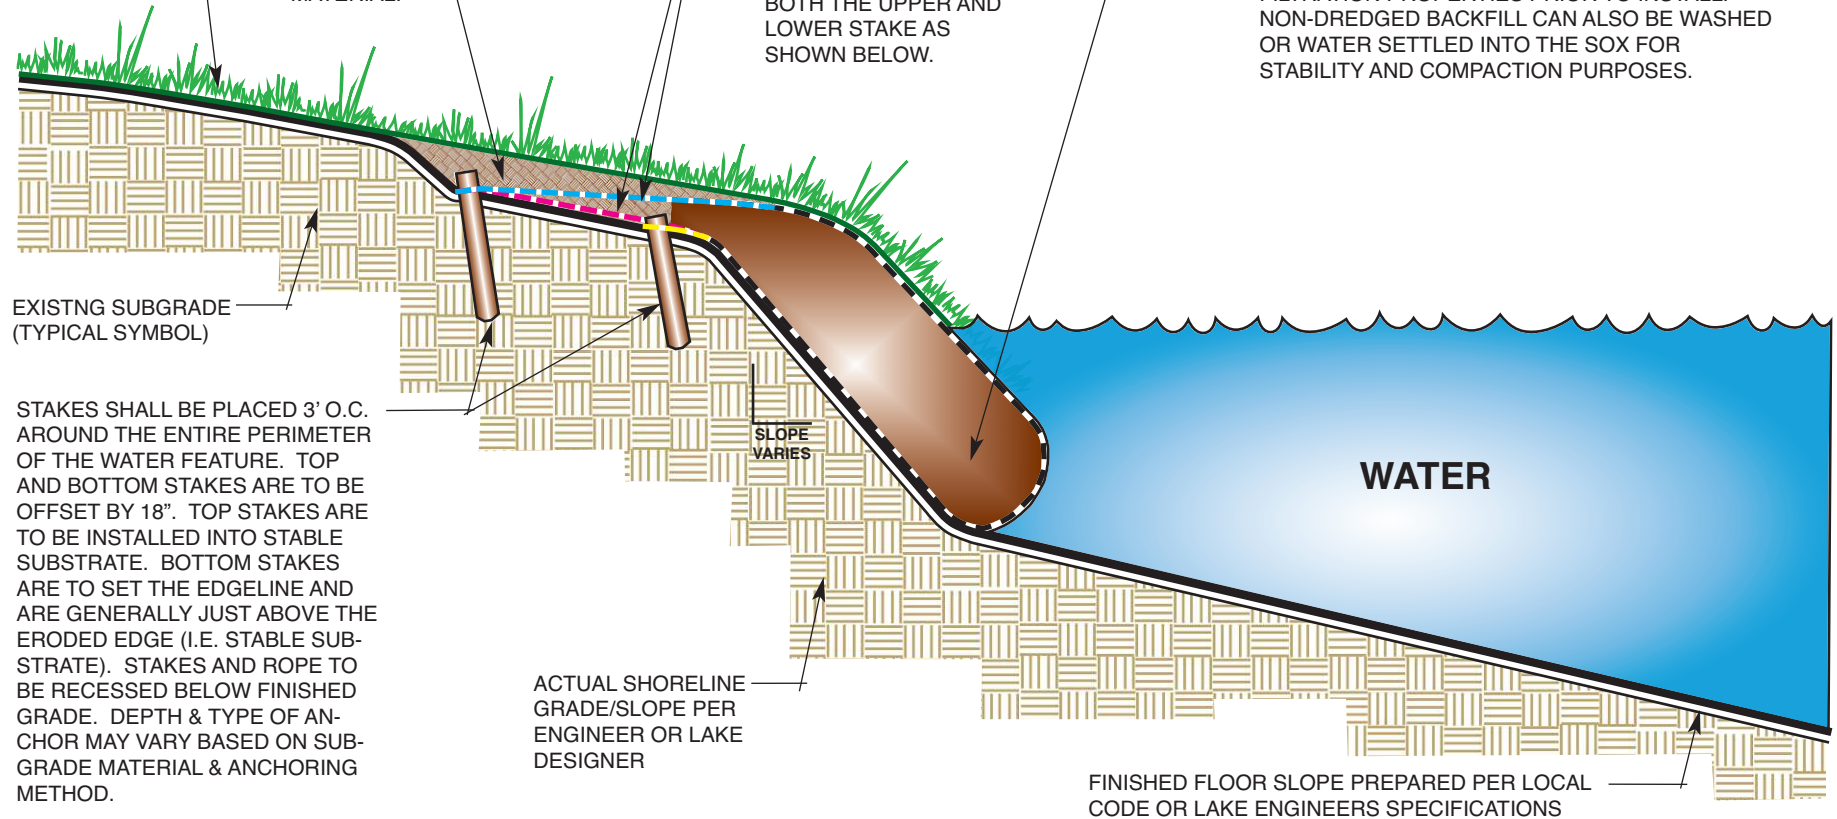

NOTE: THIS DRAWING IS A "DIAGRAMMATIC ILLUSTRATION" OF A SOX INSTALL METHOD.

QUESTIONS - Call: (408)461-0324 or Email: dginkel@soxerosion.com

SHORESOX/DREDGESOX DETAIL

LAKE/WATERWAY EDGE (NO LINER)



CORPORATE OFFICE:

950 PENINSULA CORPORATE
CIRCLE, SUITE 3018
BOCA RATON, FL 33487

(561)501.0057
WWW.SOXEROSION.COM

DRAWN BY:
D. GINKEL

APPROVED BY:
RL & BF

SCALE: N.T.S.

PROJECT: _____

DETAIL: _____

DATE: 3/3/2020
REVISIONS: 5/15/20