



ELEVATION

INTEGRATED 4" DIAMETER
SLEEVES/POCKETS
FOR STAKE ATTACHMENT

REINFORCED ANCHOR
ROPE TOP AND BOTTOM

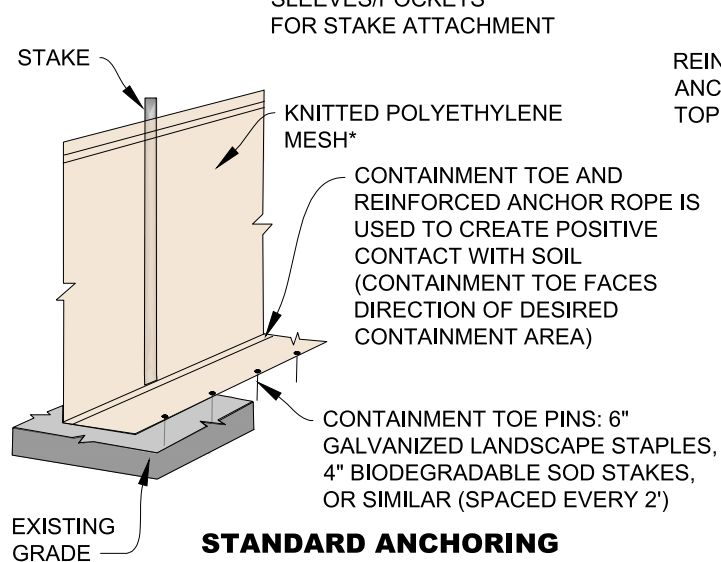

STANDARD ANCHORING METHOD

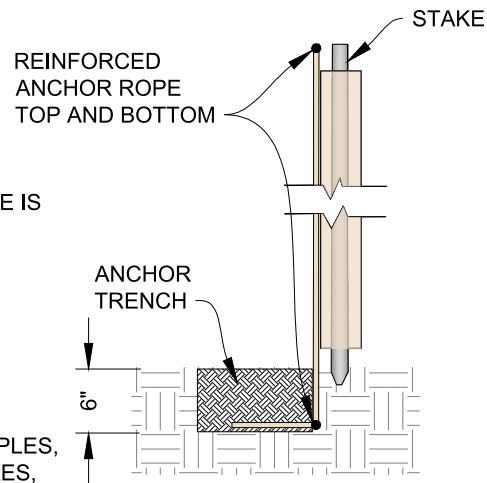

ALTERNATE TRENCHING METHOD

*KNITTED POLYETHYLENE MESH WITH THE
FOLLOWING:

- 11 SPI COURSE COUNT
- 88.5% SHADE FACTOR (ACFFA 1989)
- 3.67 OZ/SQ-YD WEIGHT (ASTM D3776)
- 63 LBS WARP AND 84 LBS FILL BREAK STRENGTH (ASTM D5034)
- 36.6% WARP AND 51.3% FILL BREAK ELONGATION (ASTM D5034)
- 25.7 LBS WARP AND 31.7 LBS FILL TEAR STRENGTH (ASTM D5587)
- 150 PSI BURSTING STRENGTH (ASTM D3786)
- 441 CFM/SF AIR PERMEABILITY (ASTM D737)
- TAN OR GREEN IN COLOR
- AVAILABLE IN FIRE RETARDANT VERSION
- 50' OR 100' LONG SECTIONS (ROLLS)

EVOGUARD DETAIL

NOT TO SCALE

